


Balun, 75/120W, 2-8Mbit/s 1.0/2.3 (m) Posi-Lock to 3 Pole IDC

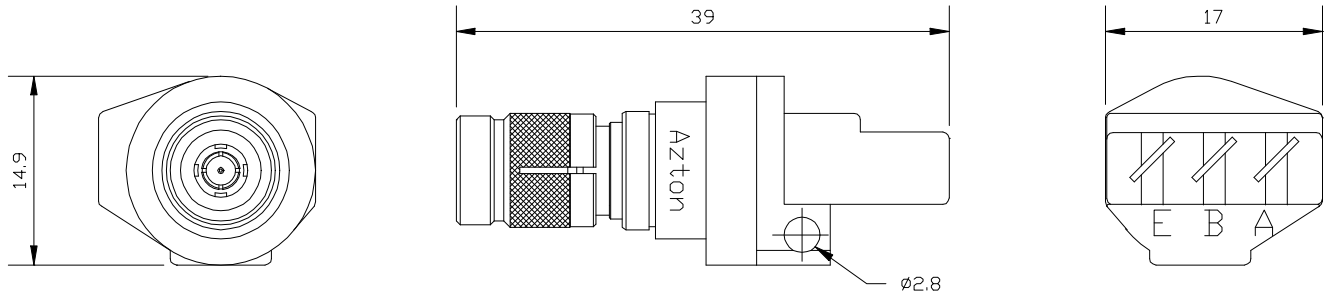

PRODUCT DESCRIPTION

This Balun converts E1 and E2 G.703 signals from unbalanced 75Ω coaxial to balanced 120Ω twisted pair transmissions. A bi-directional device requiring no external power, it allows the user to connect telecommunications equipment with mismatched interfaces or convert a coaxial DDF to twisted pair. This product offers the following features:-


- coax to twisted pair conversion
- exceeds G.703 requirements
- > 33dB return loss 0.3 to 3MHz
- shielded construction
- genuine Krone® IDC
- 1.0/2.3 (m) connector to IEC 169-29
- 75Ω to 120Ω impedances
- < 0.15dB E1 insertion loss
- > 1.25μm of gold plating on pin
- designed for long life
- small size
- 2 and 8Mbit/s data rates
- > 70dB cross talk
- teflon coaxial insulators
- built for high reliability

OPERATING CONDITIONS

Matching Impedance:	75 ohm unbalanced coaxial to 120 ohm balanced twisted pair
Bit Rate:	2Mbit/s and 8Mbit/s per ITU-T G.703 Line Code
Signal Level:	2.37V nominal peak voltage at the coaxial end per G.703
Working Temperature:	-30°C to 75°C

ELECTRICAL SPECIFICATIONS

Insertion Loss:	< 0.15dB from 51kHz to 3.072MHz and < 0.20dB from 211kHz to 12.673MHz in both directions
Return Loss:	Exceeds G.703 requirements in both directions > 26dB from 51kHz to 3.072MHz and > 22dB from 211kHz to 12.673MHz
Pulse Shape:	Exceeds G.703 requirements for 2Mbit/s and 8Mbit/s
Cross Talk:	> 70dB from 51kHz to 12.673MHz, 2 baluns 15mm apart
Isolation Voltage:	< 250V DC



MECHANICAL SPECIFICATIONS

Coaxial Connector:	1.0/2.3 male to IEC 169-29 Body: Brass, Plated Cu/Ni5 and Cu/Ni2/Sn5 Slotted Contact: Beryllium Copper, Plated Cu/Ni5/Au0.8 Pin: Brass, Plated Cu/Ni5/Au1.25 Insulator: Teflon Mating Cycles: 500min
IDC Connector:	Wire: Conductor Ø 0.4 to 0.65mm, Insulation Ø 0.7 to 1.4mm Contacts: Silver Plated Moulding: Polyester White Mating Cycles: 50min
Mouldings:	Noryl Black

TERMINATION

IDC:	Krone Connection Tool 6089 2 003-00 or 6417 1 810-02
------	--

^a registered trade mark of the Krone Company